



# EMH2801

## P-Channel Power MOSFET -20V, -3A, 85mΩ, Single EMH8 with Schottky Diode

ON Semiconductor®

<http://onsemi.com>

### Features

- Composite type with a P-Channel Silicon MOSFET and a Schottky Barrier Diode contained in one package facilitating high-density mounting
- [MOSFET] • Low ON-resistance
- [SBD] • Small switching noise
- Halogen free compliance
- 1.8V drive
- Low forward voltage (IF=2.0A, VF max=0.46V)

### Specifications

#### Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
[MOSFET]				
Drain-to-Source Voltage	VDSS		-20	V
Gate-to-Source Voltage	VGSS		±10	V
Drain Current (DC)	ID		-3	A
Drain Current (Pulse)	IDP	PW≤10μs, duty cycle≤1%	-20	A
Allowable Power Dissipation	PD	When mounted on ceramic substrate (900mm²×0.8mm) 1unit	1.0	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		-55 to +125	°C

Continued on next page.


This product is designed to "ESD immunity < 200V\*\*", so please take care when handling.

\* Machine Model

### Package Dimensions

unit : mm (typ)


7045-007

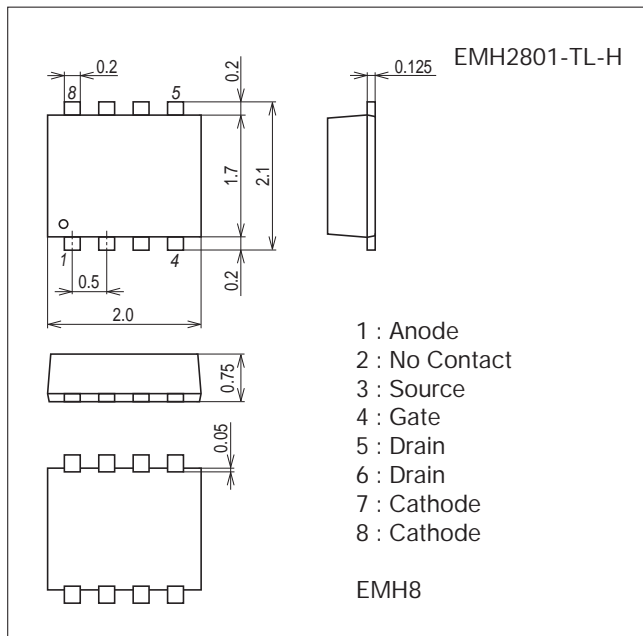


### Product & Package Information

- Package : EMH8
- JEITA, JEDEC : -
- Minimum Packing Quantity : 3,000 pcs./reel


### Packing Type : TL



### Marking



### Electrical Connection

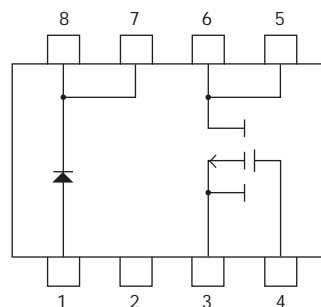

# EMH2801

Continued from preceding page.

Parameter	Symbol	Conditions	Ratings	Unit
[SBD]				
Repetitive Peak Reverse Voltage	$V_{RRM}$		15	V
Nonrepetitive Peak Reverse Surge Voltage	$V_{RSM}$		15	V
Average Output Current	$I_O$	Rectangular wave	2.0	A
Surge Forward Current	$I_{FSM}$	50Hz sine wave, 1 cycle	20	A
Junction Temperature	$T_j$		-55 to +125	°C
Storage Temperature	$T_{stg}$		-55 to +125	°C


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

## Electrical Characteristics at $T_a=25^\circ\text{C}$


Parameter	Symbol	Conditions	Ratings			Unit	
			min	typ	max		
[MOSFET]							
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D=-1\text{mA}, V_{GS}=0\text{V}$	-20			V	
Zero-Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=-20\text{V}, V_{GS}=0\text{V}$			-1	$\mu\text{A}$	
Gate-to-Source Leakage Current	$I_{GSS}$	$V_{GS}=\pm 8\text{V}, V_{DS}=0\text{V}$			$\pm 10$	$\mu\text{A}$	
Cutoff Voltage	$V_{GS(off)}$	$V_{DS}=-10\text{V}, I_D=-1\text{mA}$	-0.4		-1.3	V	
Forward Transfer Admittance	$ y_{fs} $	$V_{DS}=-10\text{V}, I_D=-1.5\text{A}$		3.6		S	
Static Drain-to-Source On-State Resistance	$R_{DS(on)1}$	$I_D=-1.5\text{A}, V_{GS}=-4.5\text{V}$		65	85	$\text{m}\Omega$	
	$R_{DS(on)2}$	$I_D=-1\text{A}, V_{GS}=-2.5\text{V}$		98	137	$\text{m}\Omega$	
	$R_{DS(on)3}$	$I_D=-0.5\text{A}, V_{GS}=-1.8\text{V}$		155	235	$\text{m}\Omega$	
Input Capacitance	$C_{iss}$	See specified Test Circuit.		320		pF	
Output Capacitance	$C_{oss}$		$V_{DS}=-10\text{V}, f=1\text{MHz}$		66		pF
Reverse Transfer Capacitance	$C_{rss}$				50		pF
Turn-ON Delay Time	$t_d(on)$				7.1		ns
Rise Time	$t_r$				21		ns
Turn-OFF Delay Time	$t_d(off)$				37		ns
Fall Time	$t_f$				32		ns
Total Gate Charge	$Q_g$				4.0		nC
Gate-to-Source Charge	$Q_{gs}$		$V_{DS}=-10\text{V}, V_{GS}=-4.5\text{V}, I_D=-3\text{A}$		0.6		nC
Gate-to-Drain "Miller" Charge	$Q_{gd}$				1.1		nC
Diode Forward Voltage	$V_{SD}$	$I_S=-3\text{A}, V_{GS}=0\text{V}$		-0.83	-1.2	V	
[SBD]							
Reverse Voltage	$V_R$	$I_R=1\text{mA}$	15			V	
Forward Voltage	$V_{F1}$	$I_F=1.0\text{A}$		0.33	0.39	V	
	$V_{F2}$	$I_F=2.0\text{A}$		0.39	0.46	V	
Reverse Current	$I_R$	$V_R=7.5\text{V}$			300	$\mu\text{A}$	
Interterminal Capacitance	$C$	$V_R=10\text{V}, f=1\text{MHz}$		35		pF	

# EMH2801

## Switching Time Test Circuit (MOSFET)




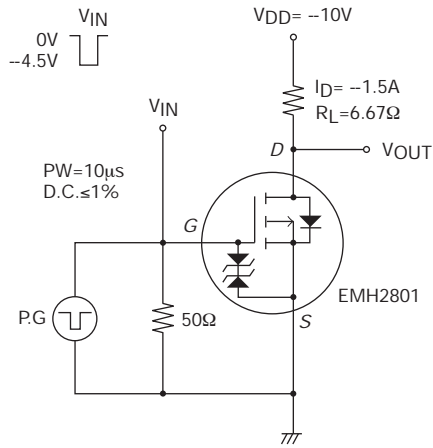









## t<sub>rr</sub> Test Circuit (SBD)






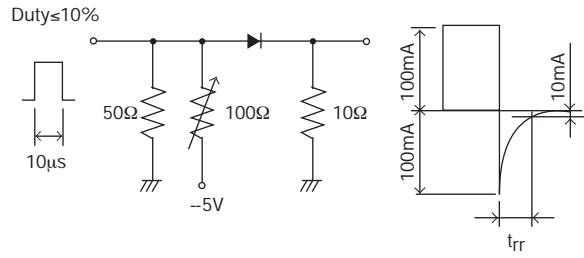


## Ordering Information

Device	Package	Shipping	memo
EMH2801-TL-H	EMH8	3,000pcs./reel	Pb Free and Halogen Free

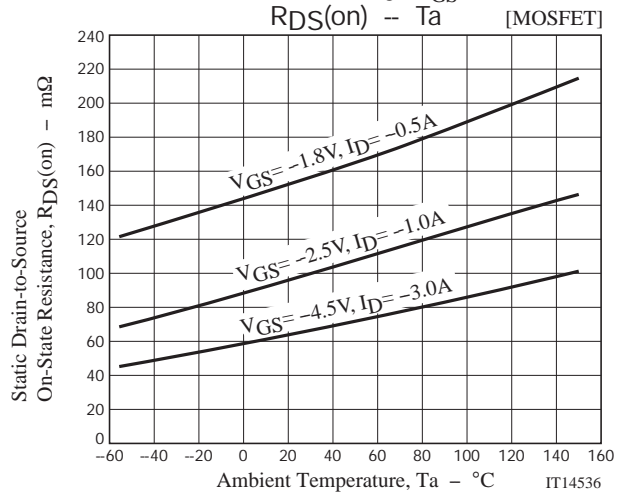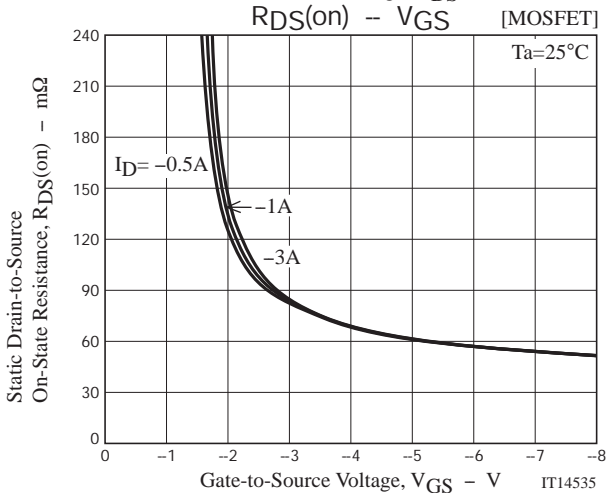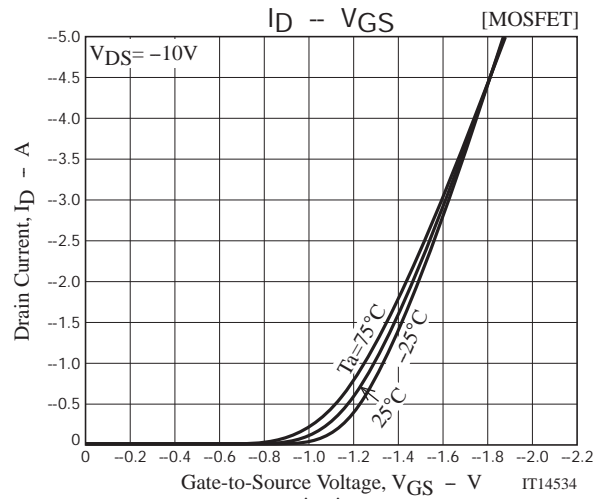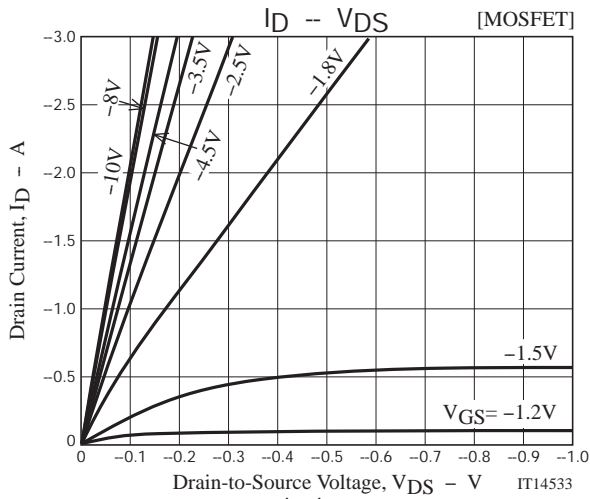

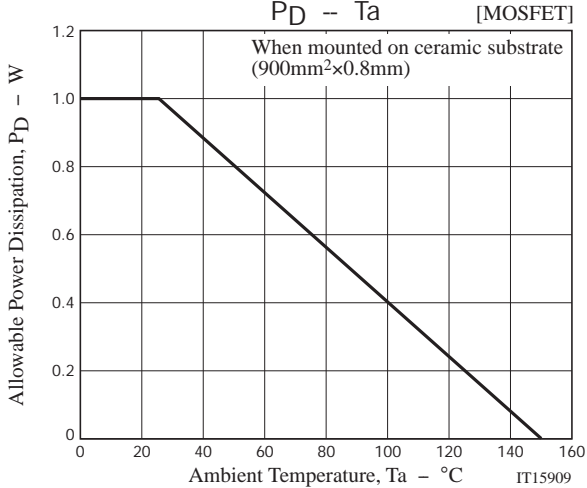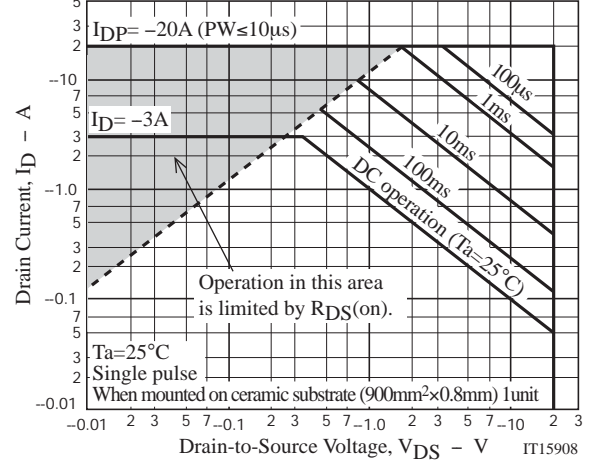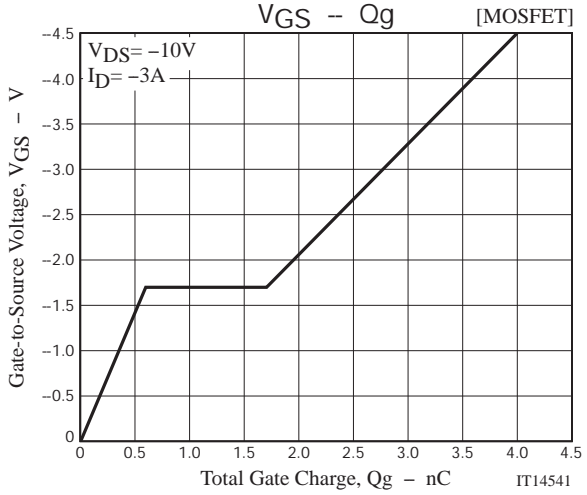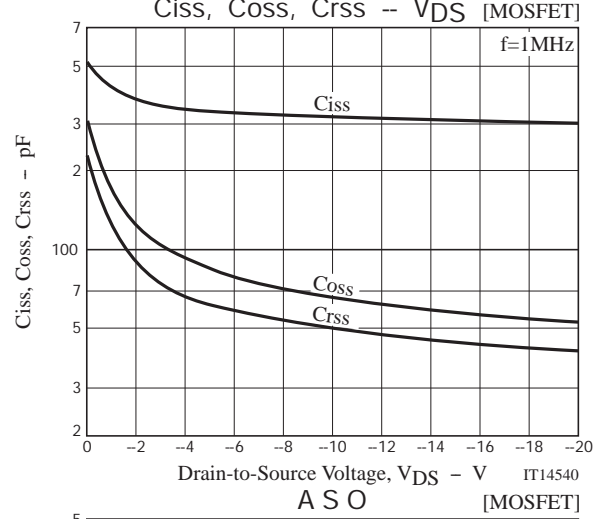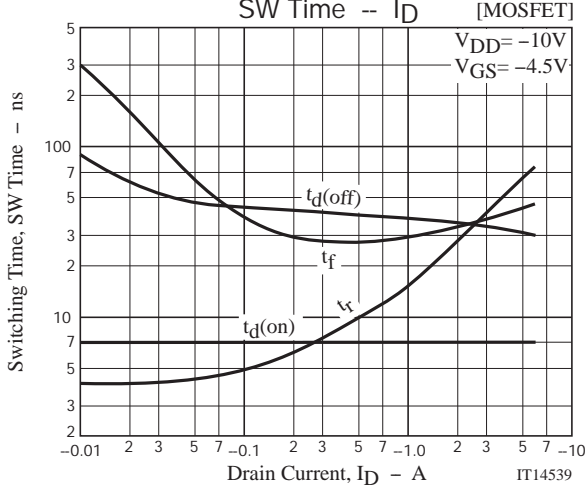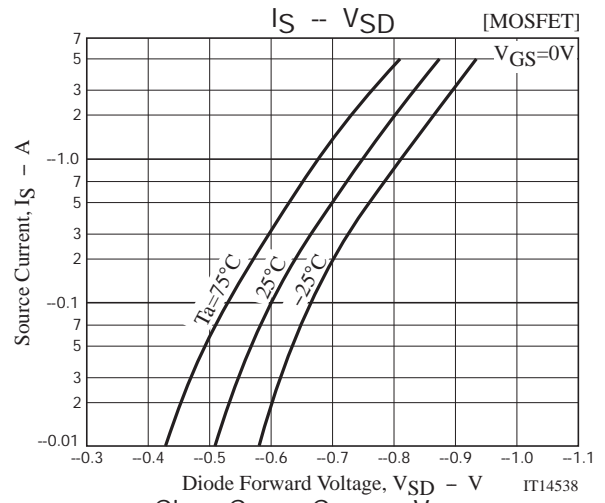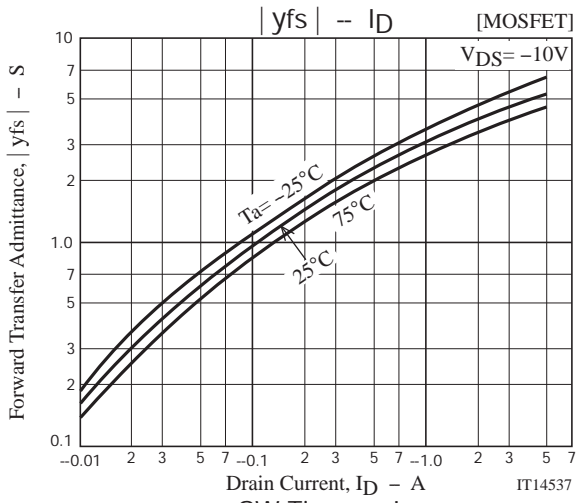

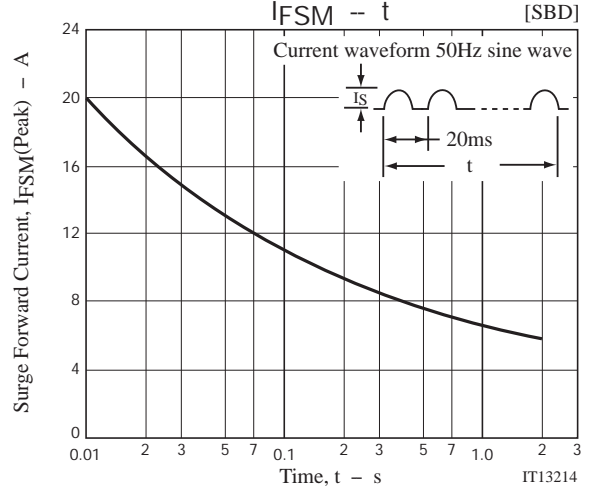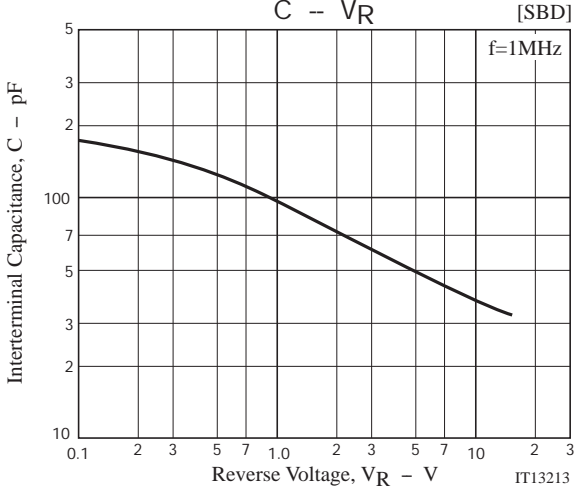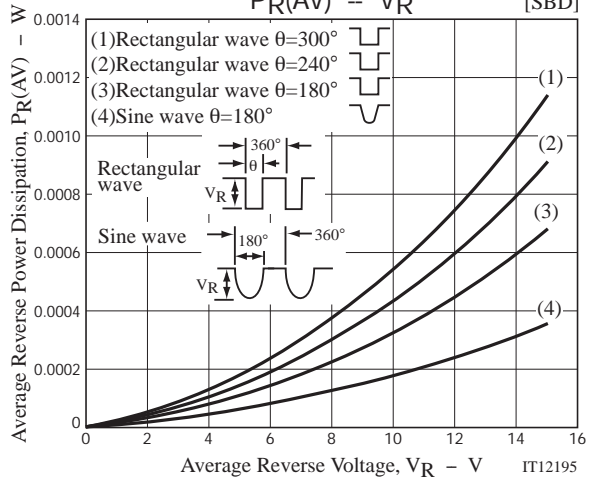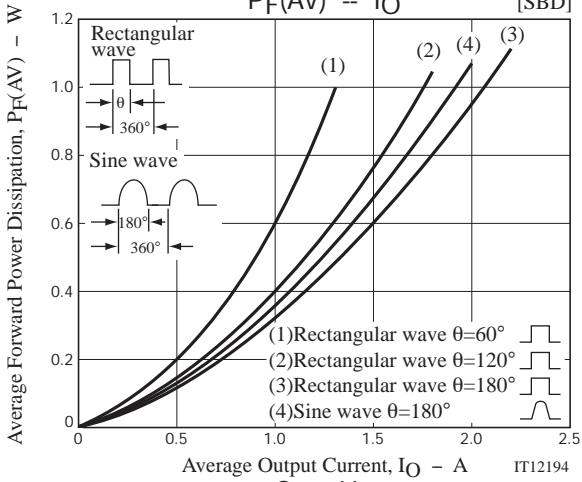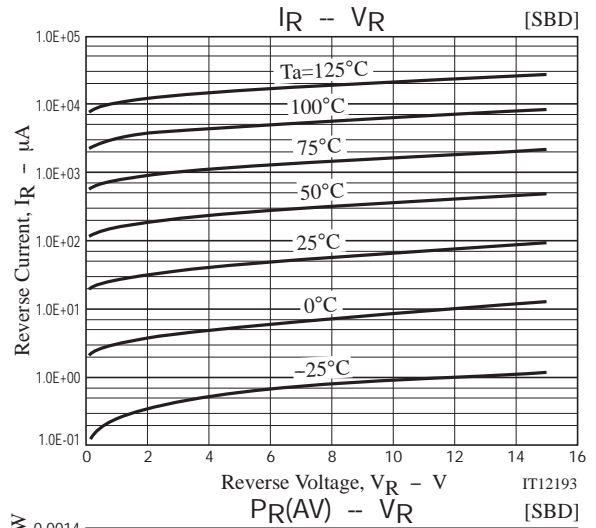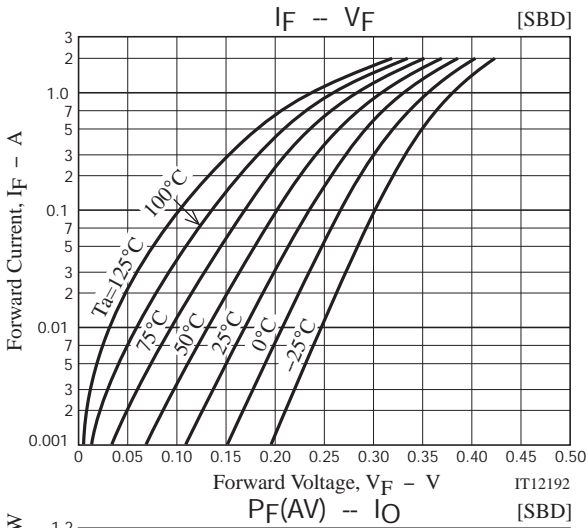

# EMH2801


## Embossed Taping Specification

EMH2801-TL-H

### 1. Packing Format

Package Name	Carrier Tape Type	Maximum Number of devices contained (pcs)			Packing format	
		Reel	Inner box	Outer box	Inner BOX (C-1)	Outer BOX (A-7)
EMH8	MCP4	3,000	15,000	90,000	5 reels contained Dimensions:mm (external) 183×72×185	6 inner boxes contained Dimensions:mm (external) 440×195×210


#### Packing method

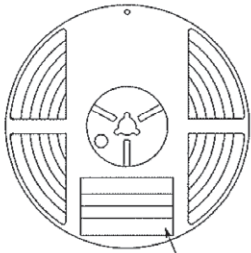

Reel label


Type No. →  
LOT No. →  
Quantity →  
Origin →

Reel label, Inner box label  
(unit:mm)

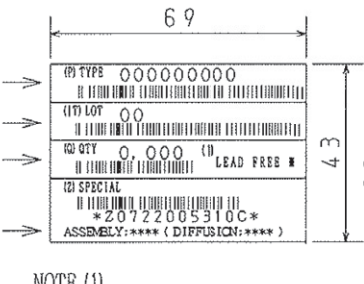

Outer box label

It is a label at the time of factory shipments. The form of a label may change in physical distribution process.

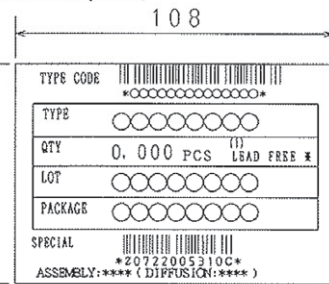


#### NOTE (1)

The LEAD FREE \* description shows that the surface treatment of the terminal is lead free.


Label	JEITA Phase
LEAD FREE 3	JEITA Phase 3A
LEAD FREE 4	JEITA Phase 3

### 2. Taping configuration

#### 2-1. Carrier tape size (unit:mm)

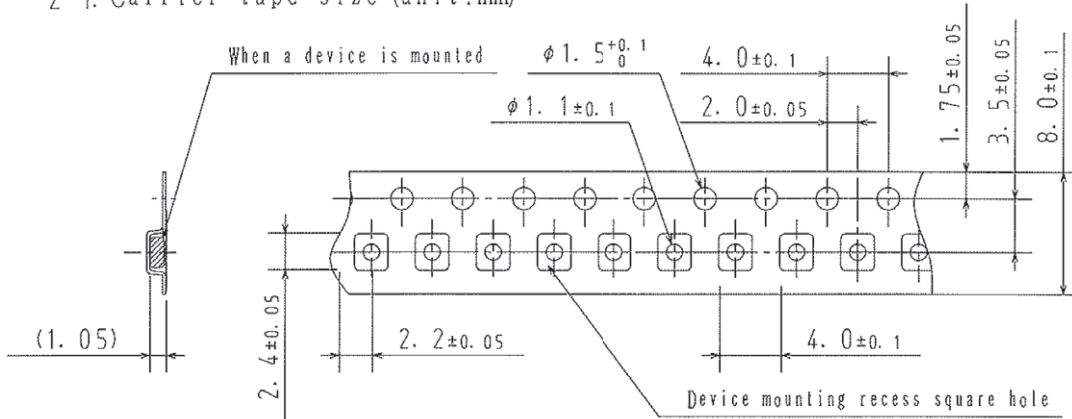


#### 2-2. Device placement direction

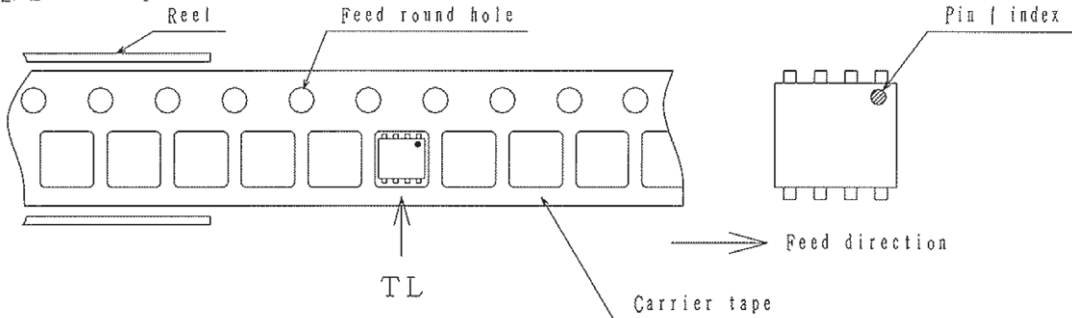


Those with pin 1 index on the feed hole side.....TL

# EMH2801

## Outline Drawing EMH2801-TL-H

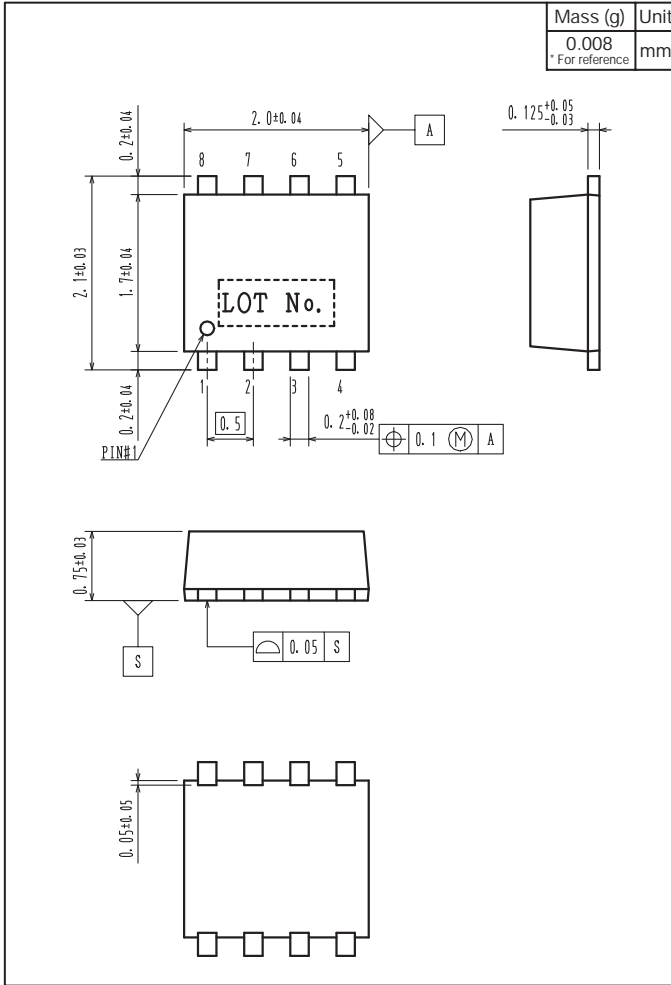

## Land Pattern Example

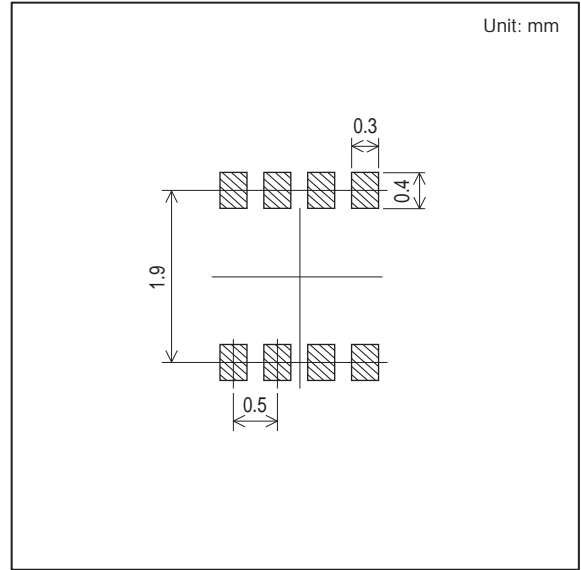

Note on usage : Since the EMH2801 is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[EMH2801-TL-H](#)