



MCH6445

N-Channel Power MOSFET 60V, 4A, 78mΩ, Single MCPH6

ON Semiconductor®

<http://onsemi.com>

Features

- 4V drive
- Low ON-resistance
- Protection diode in

Specifications

Absolute Maximum Ratings at Ta=25°C


| Parameter | Symbol | Conditions | Ratings | Unit |
|-----------------------------|------------------|--|-------------|------|
| Drain-to-Source Voltage | V _{DSS} | | 60 | V |
| Gate-to-Source Voltage | V _{GSS} | | ±20 | V |
| Drain Current (DC) | I _D | | 4 | A |
| Drain Current (Pulse) | I _{DP} | PW≤10μs, duty cycle≤1% | 16 | A |
| Allowable Power Dissipation | P _D | When mounted on ceramic substrate (1500mm ² ×0.8mm) | 1.5 | W |
| Channel Temperature | T _{ch} | | 150 | °C |
| Storage Temperature | T _{stg} | | -55 to +150 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Package Dimensions

unit : mm (typ)


7022A-009

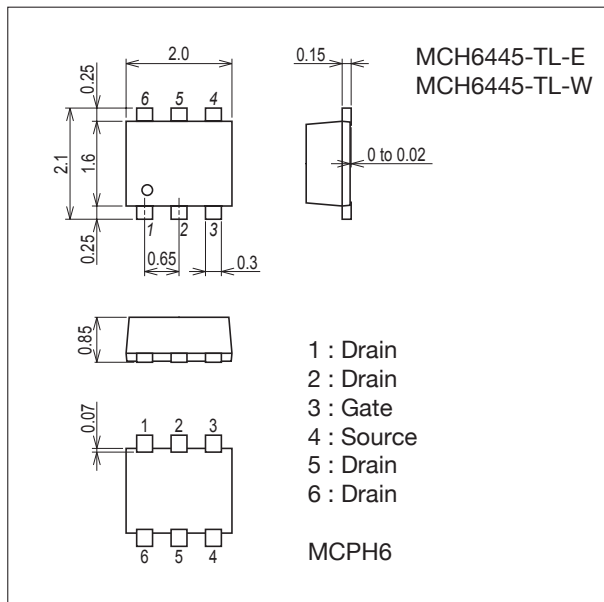


Product & Package Information

- Package : MCPH6
- JEITA, JEDEC : SC-88, SC-70-6, SOT-363
- Minimum Packing Quantity : 3,000 pcs./reel


Packing Type : TL



Marking



Electrical Connection



ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.


MCH6445

Electrical Characteristics at Ta=25°C

| Parameter | Symbol | Conditions | Ratings | | | Unit |
|--|---------------|----------------------------------|-----------------------------|------|----------|-----------|
| | | | min | typ | max | |
| Drain-to-Source Breakdown Voltage | $V_{(BR)DSS}$ | $I_D=1mA, V_{GS}=0V$ | 60 | | | V |
| Zero-Gate Voltage Drain Current | I_{DSS} | $V_{DS}=60V, V_{GS}=0V$ | | | 1 | μA |
| Gate-to-Source Leakage Current | I_{GSS} | $V_{GS}=\pm 16V, V_{DS}=0V$ | | | ± 10 | μA |
| Cutoff Voltage | $V_{GS(off)}$ | $V_{DS}=10V, I_D=1mA$ | 1.2 | | 2.6 | V |
| Forward Transfer Admittance | $ y_{fs} $ | $V_{DS}=10V, I_D=2A$ | | 3 | | S |
| Static Drain-to-Source On-State Resistance | $R_{DS(on)1}$ | $I_D=2A, V_{GS}=10V$ | | 60 | 78 | $m\Omega$ |
| | $R_{DS(on)2}$ | $I_D=1A, V_{GS}=4.5V$ | | 74 | 104 | $m\Omega$ |
| | $R_{DS(on)3}$ | $I_D=1A, V_{GS}=4V$ | | 81 | 114 | $m\Omega$ |
| Input Capacitance | C_{iss} | $V_{DS}=20V, f=1MHz$ | | 505 | | pF |
| Output Capacitance | C_{oss} | | | 57 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 37 | | pF |
| Turn-ON Delay Time | $t_{d(on)}$ | | See specified Test Circuit. | | 7.3 | |
| Rise Time | t_r | | | 9.8 | | ns |
| Turn-OFF Delay Time | $t_{d(off)}$ | | | 40 | | ns |
| Fall Time | t_f | | | 24 | | ns |
| Total Gate Charge | Q_g | $V_{DS}=30V, V_{GS}=10V, I_D=4A$ | | | 10 | |
| Gate-to-Source Charge | Q_{gs} | | | 1.6 | | nC |
| Gate-to-Drain "Miller" Charge | Q_{gd} | | | 2.1 | | nC |
| Diode Forward Voltage | V_{SD} | $I_S=4A, V_{GS}=0V$ | | 0.82 | 1.2 | V |









Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Switching Time Test Circuit



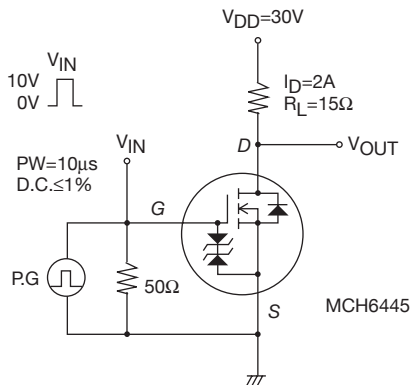


Ordering Information

| Device | Package | Shipping | memo |
|--------------|---------|----------------|--------------------------|
| MCH6445-TL-E | MCPH6 | 3,000pcs./reel | Pb-Free |
| MCH6445-TL-W | | | Pb-Free and Halogen Free |

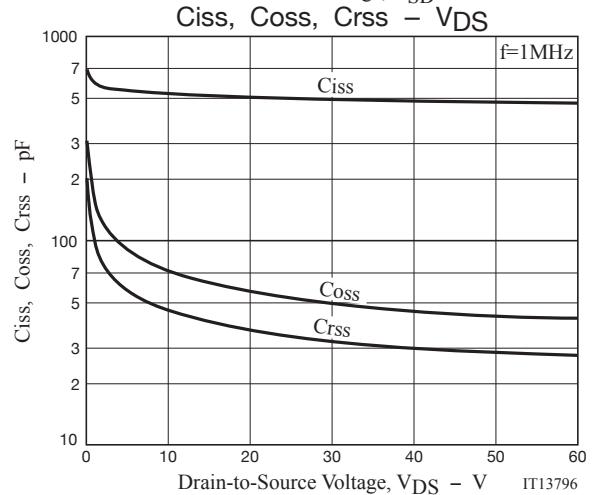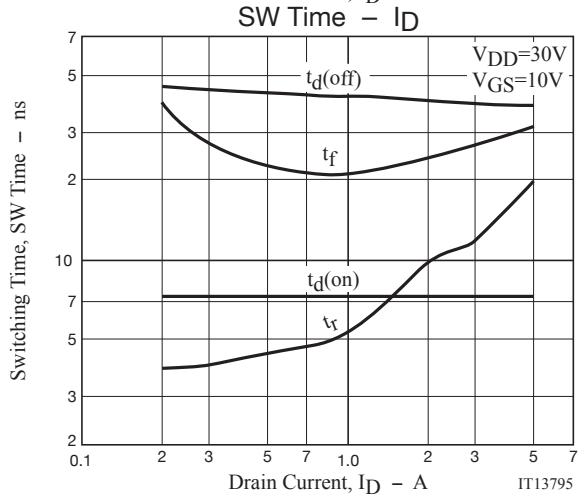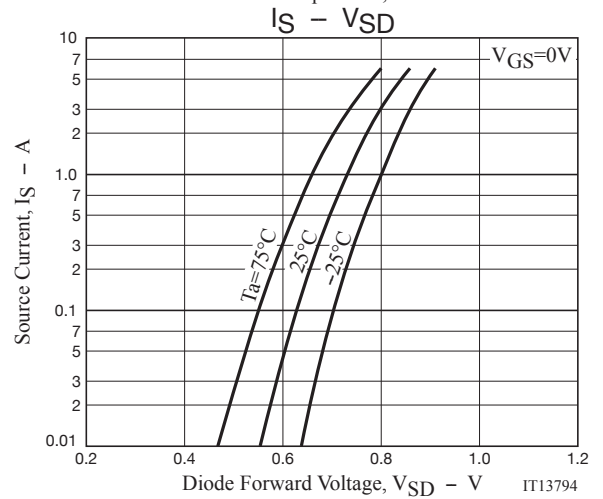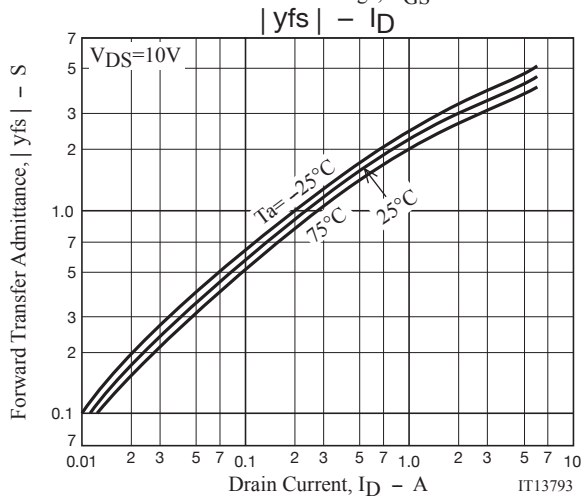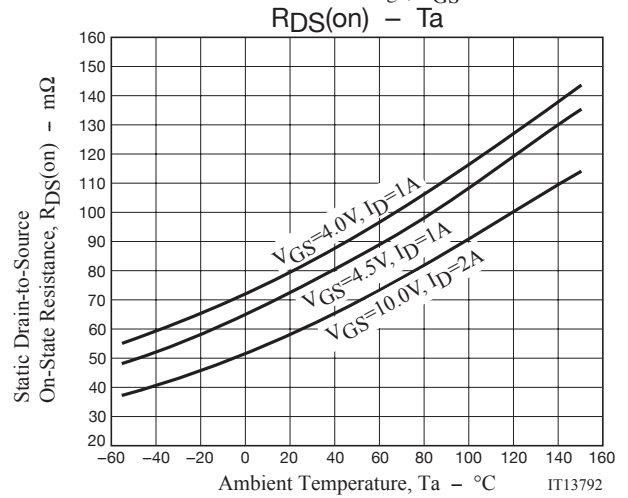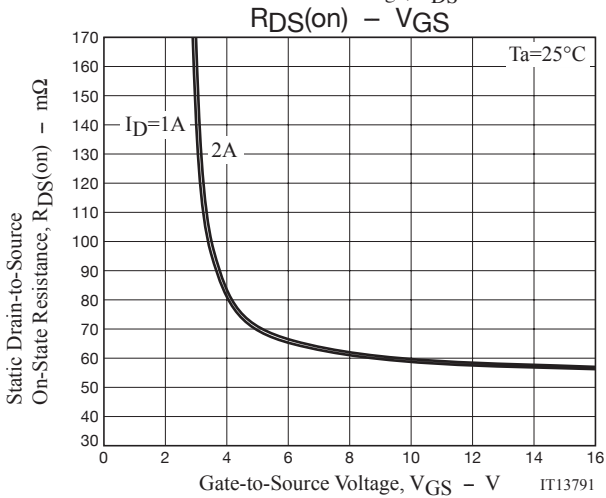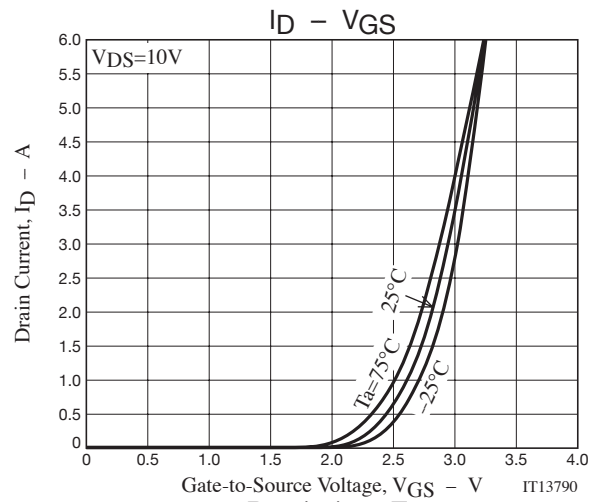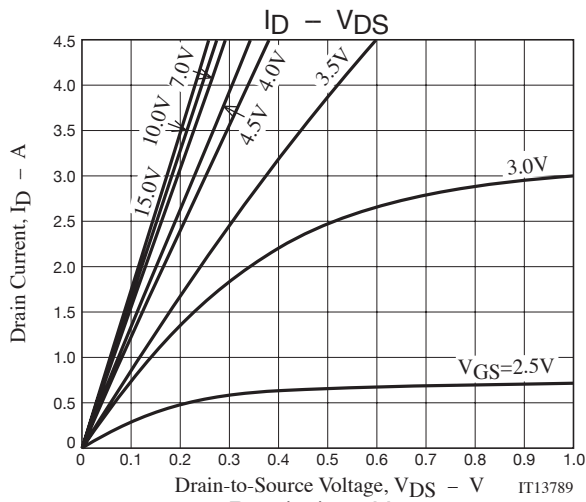


MCH6445

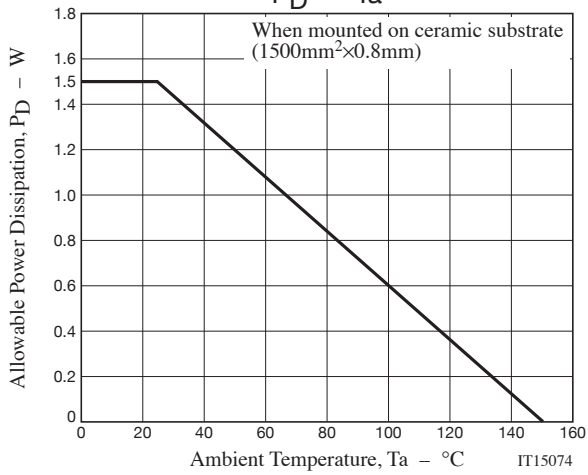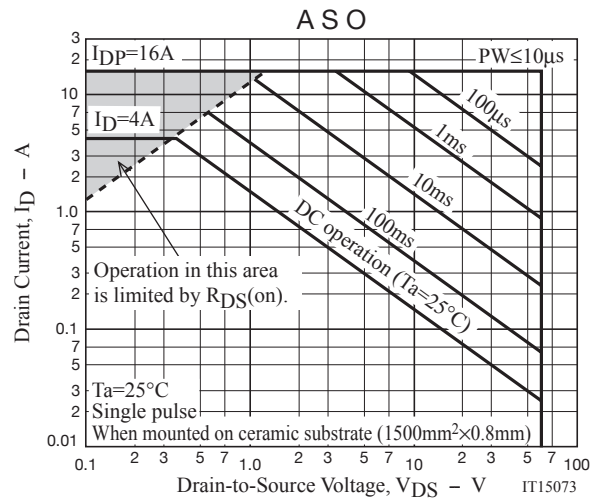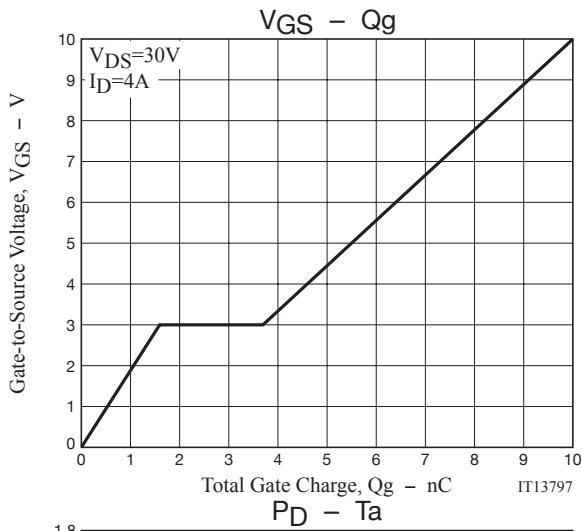


MCH6445

Outline Drawing

MCH6445-TL-E, MCH6445-TL-W

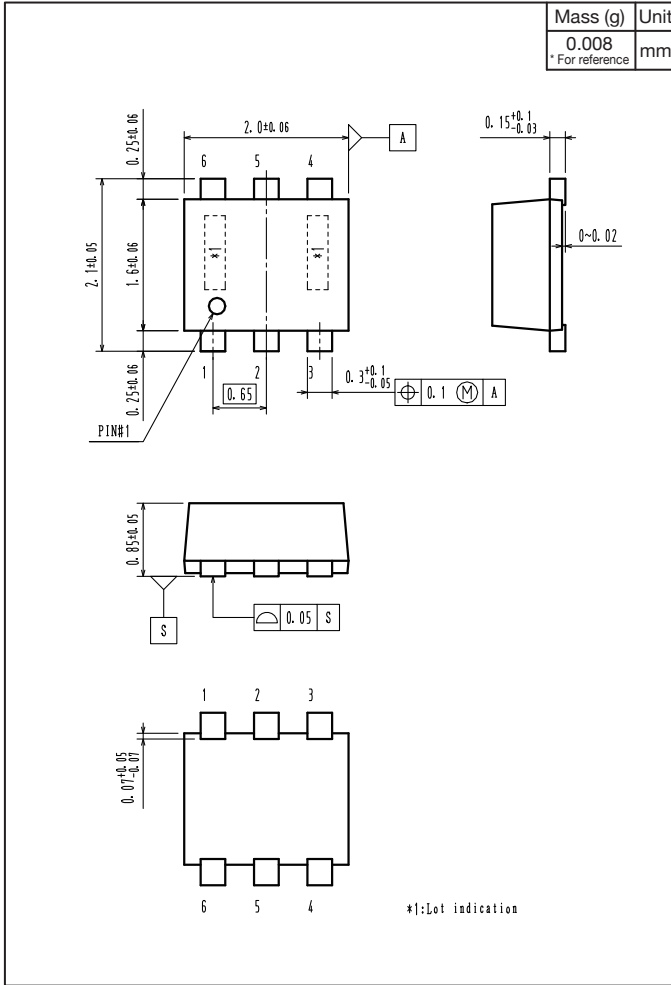

Land Pattern Example

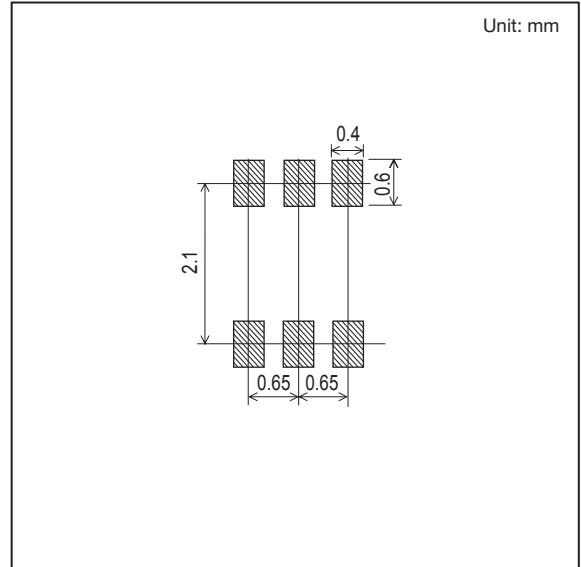

Note on usage : Since the MCH6445 is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[MCH6445-TL-W](#)